
gdmats@gdmats.eu www.gdmats.eu

GD-Thru-Plus

Technical Datasheet

All products are protected with coppyright

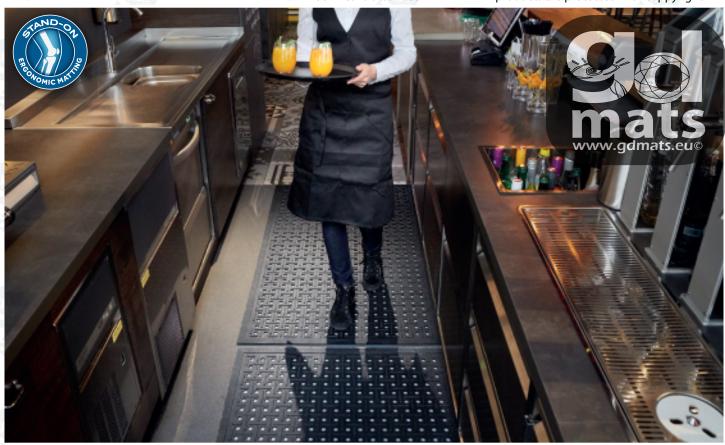

Product: GD - Thru Plus

Customs tariff number: 40169100

Product details: » Anti-bacterial properties make it ideal for kitchen placement

» Ribbed surface with holes for drainage

» Skid resistant rubber back

» Low temperature resistance -30°C » Oil and chemical resistant

» PVC-free

» Suitable for underfloor heating

» 2 year guarantee » Made in Europe

EN 13501-1 / Efl-s1 Burning behaviour:

Static electrical propensity: EN 14041 Antistatic

Slip resistance: NFSI High-Traction

Antibacterial test*: AATCC 30 / AATCC 100

Total mat weight: approx. 4.33 kg/sqm

Overall height: approx. 8 mm

Application areas: » Indoor or outdoor placement

» Professional kitchens

» Bars » Wet areas Standard sizes: 60 x 86 cm 86 x 143 cm

Rubber: 100 % Nitrile rubber Rubber thickness: approx. 8 mm Rubber weight: approx. 4.33 kg/sqm

Cleaning: Washable up to 60°C

» Tumble dry up to 60°C » Steam cleaning

» High pressure water cleaning

Mat Connector for secure linking of Accessories:

multiplemats

* NAMSA (North American Science Associates) has indicated that Kleen-Thru Plus is rated 0/NZ (no growth, no zone) in the AATCC TM 30, Part 111 test, meaning this mat has an effective fungi static treatment that helps control the bacterial and fungal growth that cause odour in the mat.

The anti-microbial treatment is registered in the USA by the Environmental Protection Agency and is bound and non-migrating, which means it is present for the life of the mat and will not wash off or rub off even when subjected to prolonged industrial washing. This treatment only protects the Kleen-Thru Plus mat and not the people who are using it. Always clean this product properly after each use

Surface detail:

