


# 592 Master Flex™ D12

Modular multi-zone entrance matting system

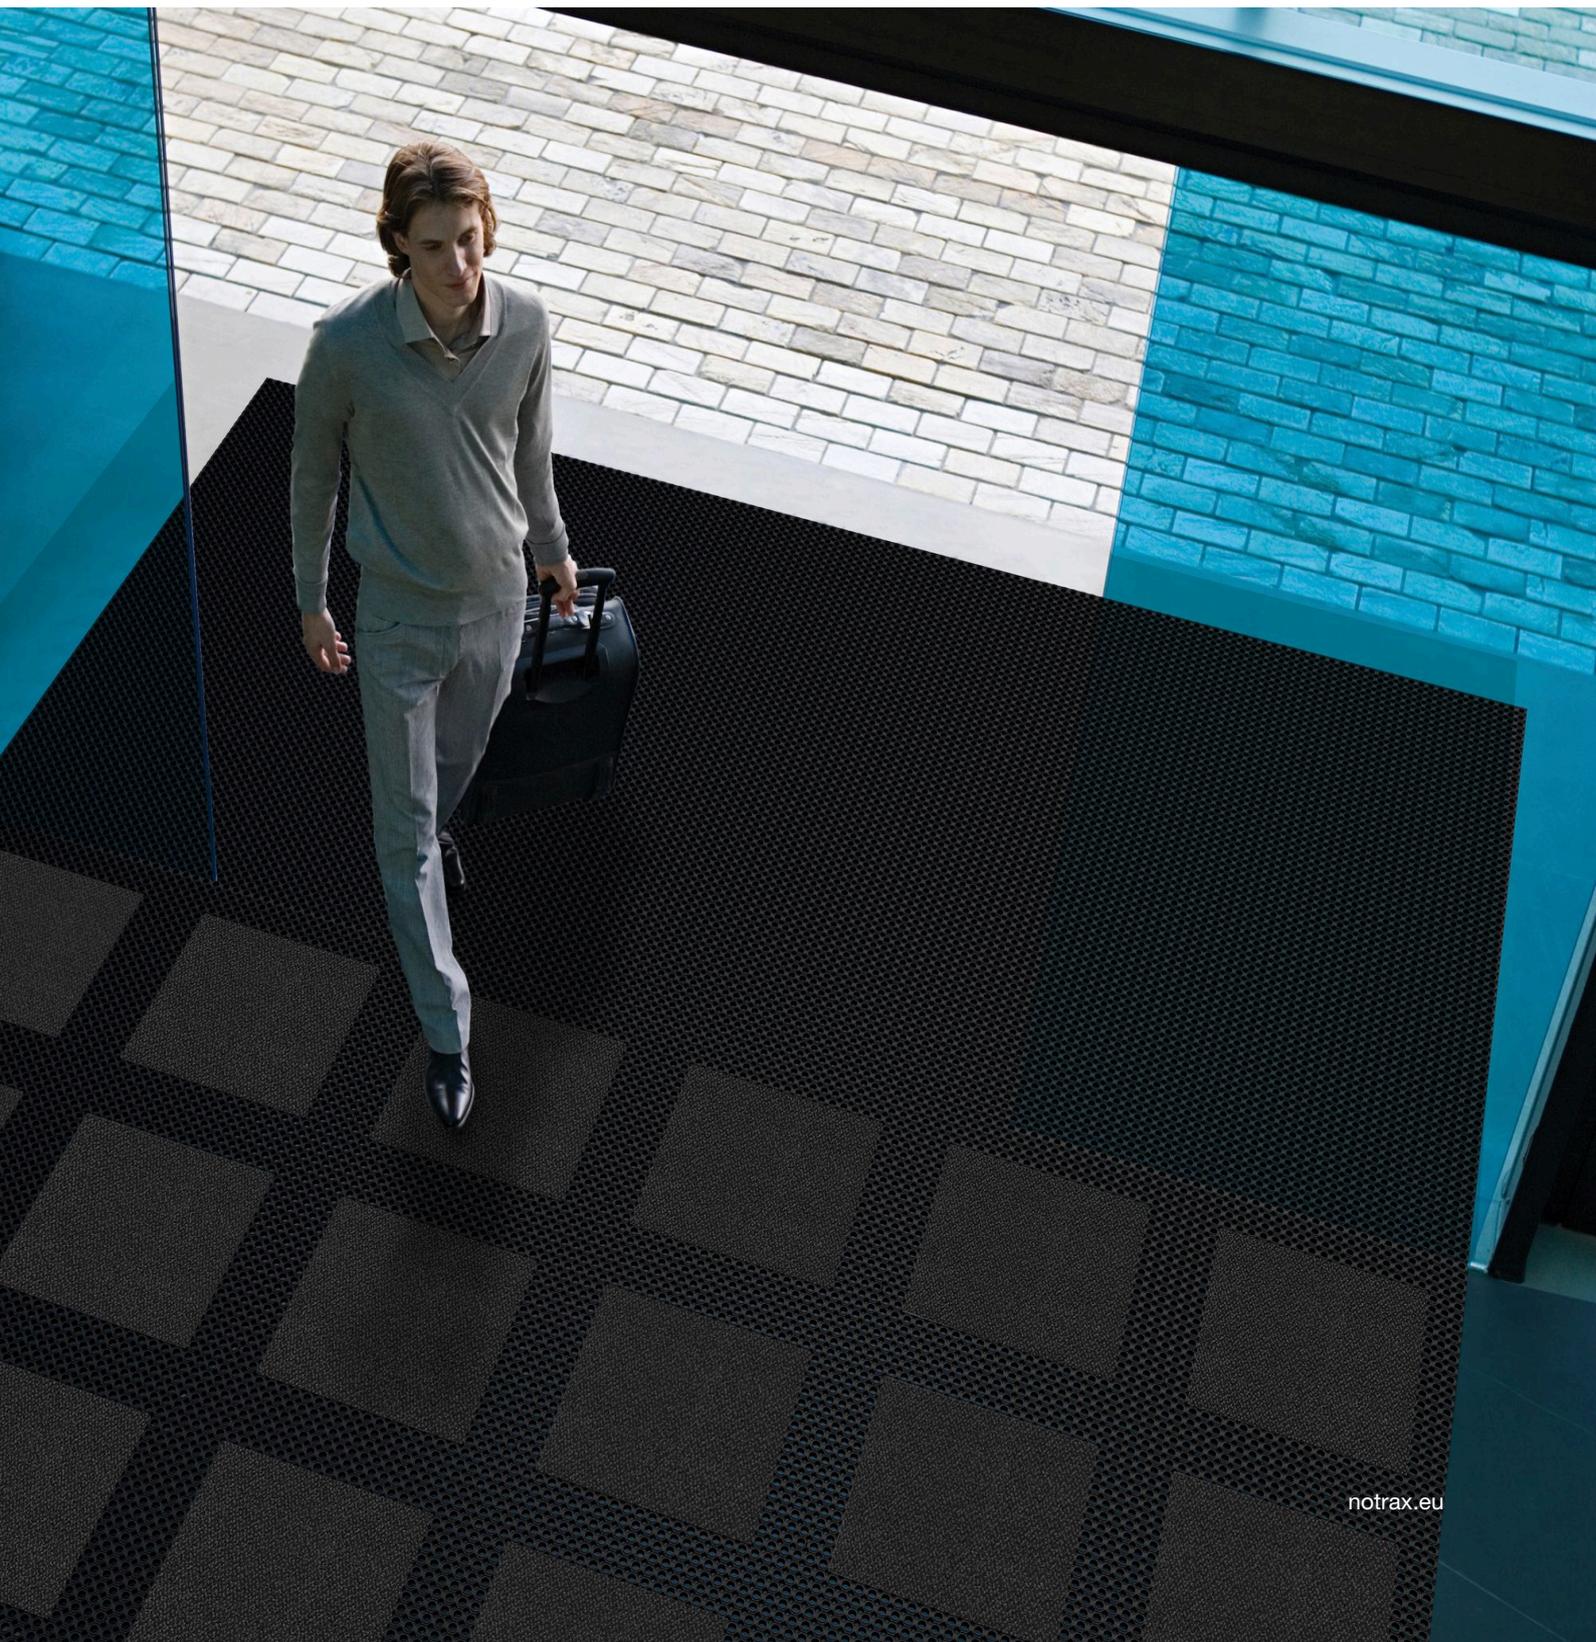

# Dust Control Matting - Outdoor Contract & Installation Matting

## 592 Master Flex™ D12

The 592 Master Flex™ D12 modular rubber mat tile has an open construction with small drainage holes and a depth of 12 mm.

- Modular multi-zone entrance mat tile
- Stylish octagonal ring design with small holes that are EU compliant for public entrances
- Its smooth surface makes it the ideal mat for wheeled access
- Provides traction and excellent drainage in extreme weather conditions
- Connects seamlessly to Master Flex™ C12 which allows easy on-site installation and a smooth and harmonious transition from outdoor to indoor

### Recommended use

- Indoor/Outdoor
- For placement in interior or exterior recessed matwell frames. Designed for pedestrian traffic, not suitable for extremely heavy loads.
- Heavy traffic

### Colors:


- Black

### Sizes:

- 50cm x 50cm
- 50cm x 50cm

### Accessories:

- 597 Master Flex™ D12/C12 Nitrile Safety Ramps

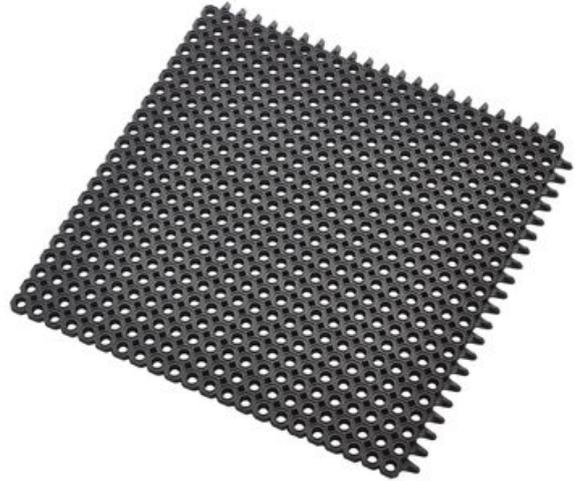

CRUSH RESISTANCE

RATING DUST CONTROL

# Dust Control Matting - Outdoor Contract & Installation Matting

## Master Flex™ D12

### General

Brand	Notrax
Category	Outdoor Contract & Installation Matting
Product Number	592
Product Family	Industrial & Commercial Matting
Product Group	Dust Control Matting
Product Name	Master Flex™ D12
Recommended use	For placement in interior or exterior recessed matwell frames. Designed for pedestrian traffic, not suitable for extremely heavy loads.
Series	Masterflex™
Shipping Location	Barendrecht 2992SB, The Netherlands, Chicago, IL 60638, United States
Type	Indoor / Outdoor - Modular Entrance Mat Systems
Update trigger	20210310-1301
Usage Intensity	Heavy traffic

### Sustainability

REACH	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Reach US	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Rohs US	Rohs compliant (Restriction of Hazardous Substances).
Warranty	1

### Tests

Fire rating US	Pass
----------------	------

### Technical Specifications

Edges	Attachable bevelled edges are available
Material	Natural rubber
Material Group	Natural rubber
Process	Compression Moulding

# Master Flex™ D12 Black

Art. nr.	Dimension (cm)	Weight (kg)	Height (cm)
592B0050OB	50cm x 50cm	27	1.2
592S0050OB	50cm x 50cm	2.5	1.2

## Accessories

597 Master Flex™ D12/  
C12 Nitrile Safety Ramps